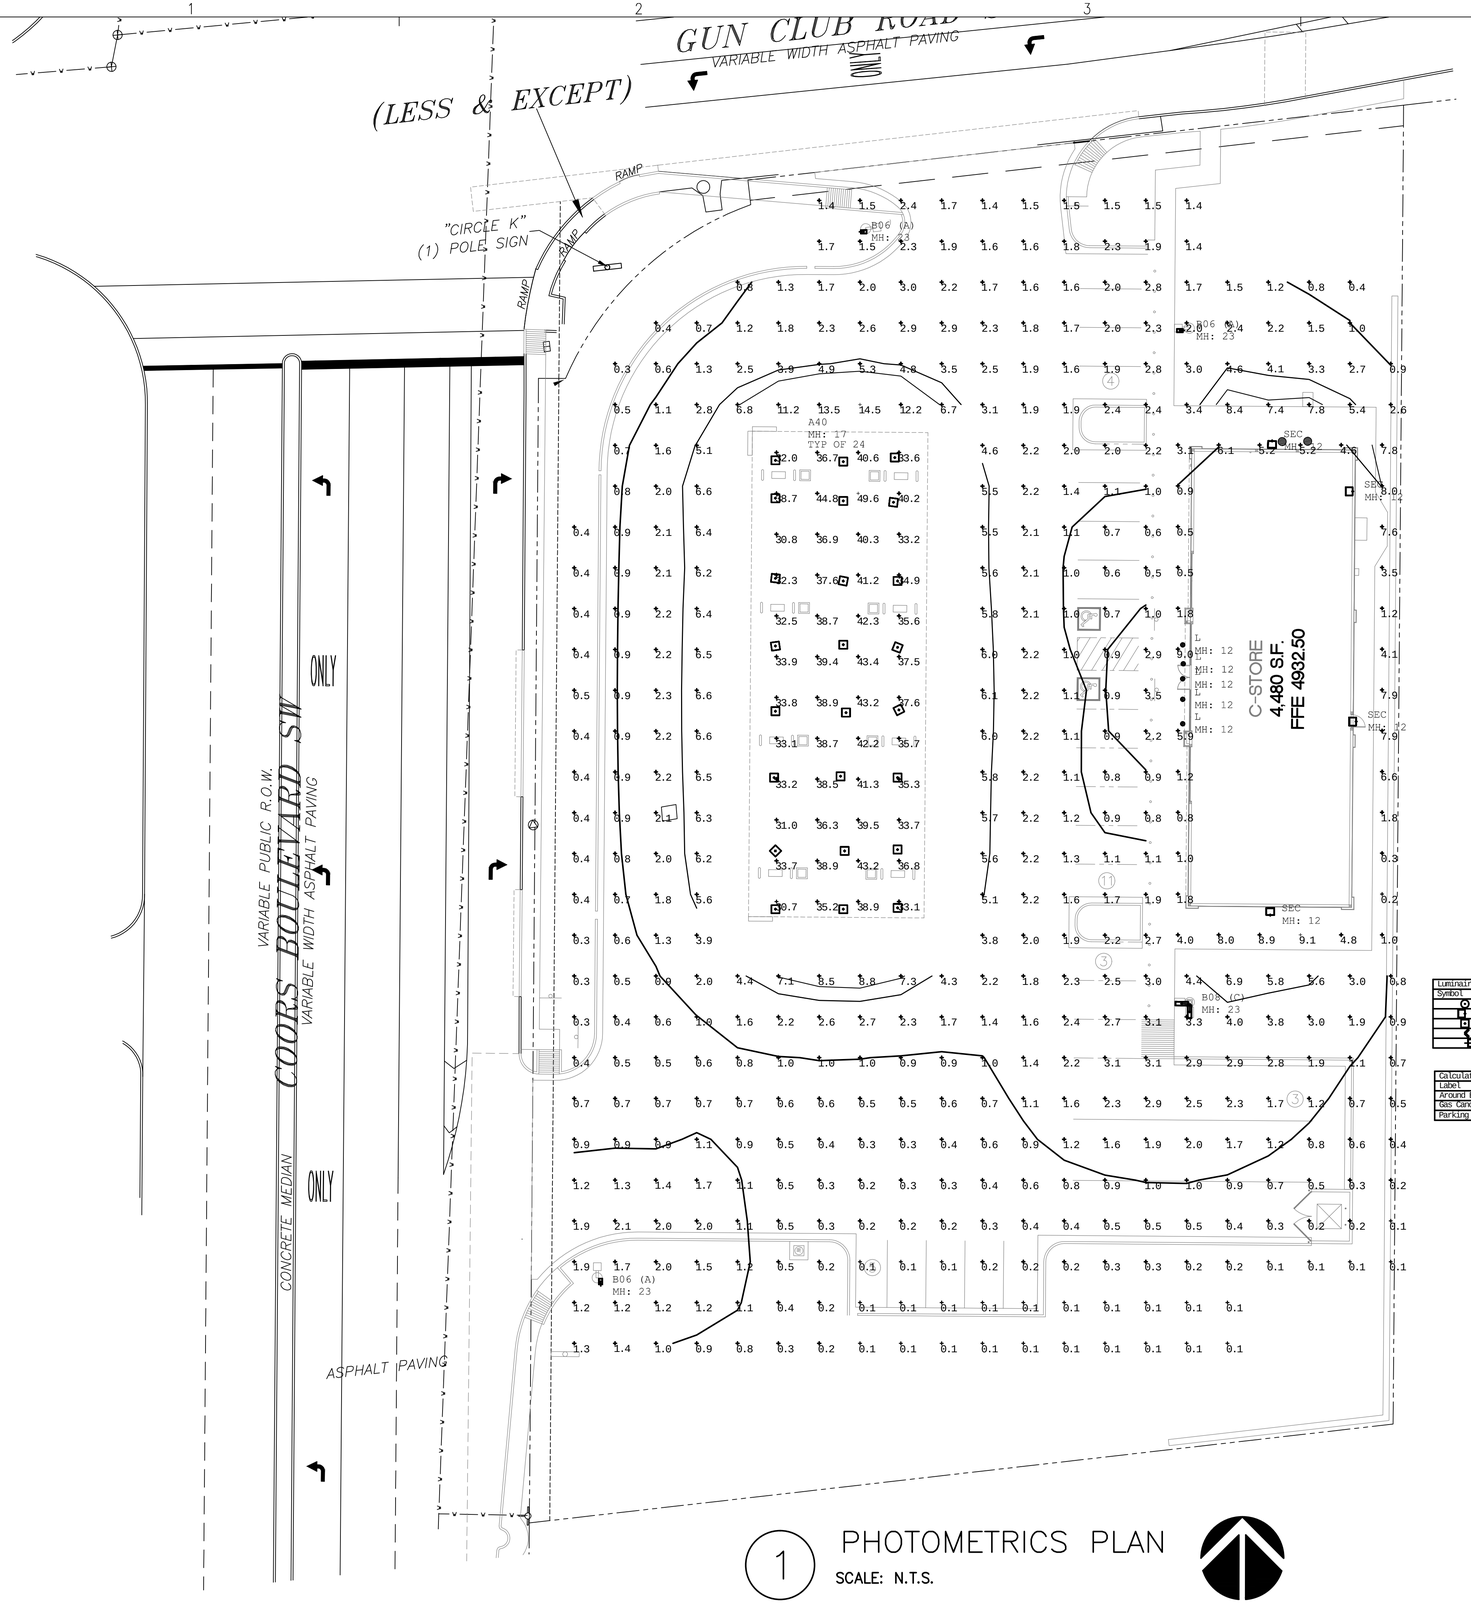

Luminaire Schedule						
Symbol	Qty	Label	Arrangement	Total Lamp Lumens	LLF	Description
	5	L	SINGLE	N.A.	0.920	LRO-10L-27K-120V (S/N - JF09A88835)
	4	SEC	SINGLE	N.A.	0.920	STR-LWY-4M--06-D-UL-700-43K OR BXSL0406D-UD7 (700mA)
	24	A40	SINGLE	N.A.	0.920	BXCCAxA13-Ux7 CPY250-A-xx-F-B-UL-xx-40K
	1	B06 (C)	2 @ 90 DEGREES	N.A.	0.920	STR-LWY-3M--08-C-UL-WH-43K OF BXSL0308C-UTW (525mA)
	3	B06 (A)	SINGLE	N.A.	0.920	STR-LWY-4M-06-D-UL-700-43K OR BXSL0406D-UD7 (700mA)

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
Around Bldg	Illuminance	Fc	4.25	9.1	0.2	21.25	45.50
Gas Canopy	Illuminance	Fc	37.28	49.6	30.7	1.21	1.62
Parking	Illuminance	Fc	1.83	14.5	0.1	19.30	145.00

FOR BID ONLY

1 PHOTOMETRICS PLAN

SCALE: N.T.S.

GreenbergFarrow
1430 W. Peachtree St., Suite 200
Atlanta, GA 30309
t: 404 601 4000 f: 404 601 3980

COPYRIGHT NOTICE
This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional

ISSUE/REVISION RECORD

DATE	DESCRIPTION
02/13/15	PERMIT SET

PROFESSIONAL SEAL

GUIDO INOA ALVAREZ
NEW MEXICO
21842
LICENSED PROFESSIONAL ENGINEER

2/16/15

PROFESSIONAL IN CHARGE
GUIDO INOA ALVAREZ

PROJECT MANAGER
GUIDO INOA ALVAREZ

QUALITY CONTROL
GUIDO INOA ALVAREZ

DRAWN BY
GUIDO INOA ALVAREZ

PROJECT NAME
CIRCLE K STORES, INC.

ALBUQUERQUE
NEW MEXICO

4400 COORS BLVD. SW
ALBUQUERQUE, NM 87121

CIRCLE K STORES INC.

PROJECT NUMBER
20130791

SHEET TITLE
PHOTOMETRICS PLAN

SHEET NUMBER
E1.2

CIRCLE K SOUTHWEST PROTOTYPE 4480 - 08/13/2013
Drawing Name: P:\2013\20130791\CDD\Electrical Construction Documents AT EF\Circ Store\Photocell\E1.2.dwg Last Modified: Feb 16, 2015 - 4:24pm Plotted on: Feb 16, 2015 - 1:00pm by gdinoa