



F3	EXTERIOR EMERGENCY LIGHTING DETAIL
----	------------------------------------

N.T.S.

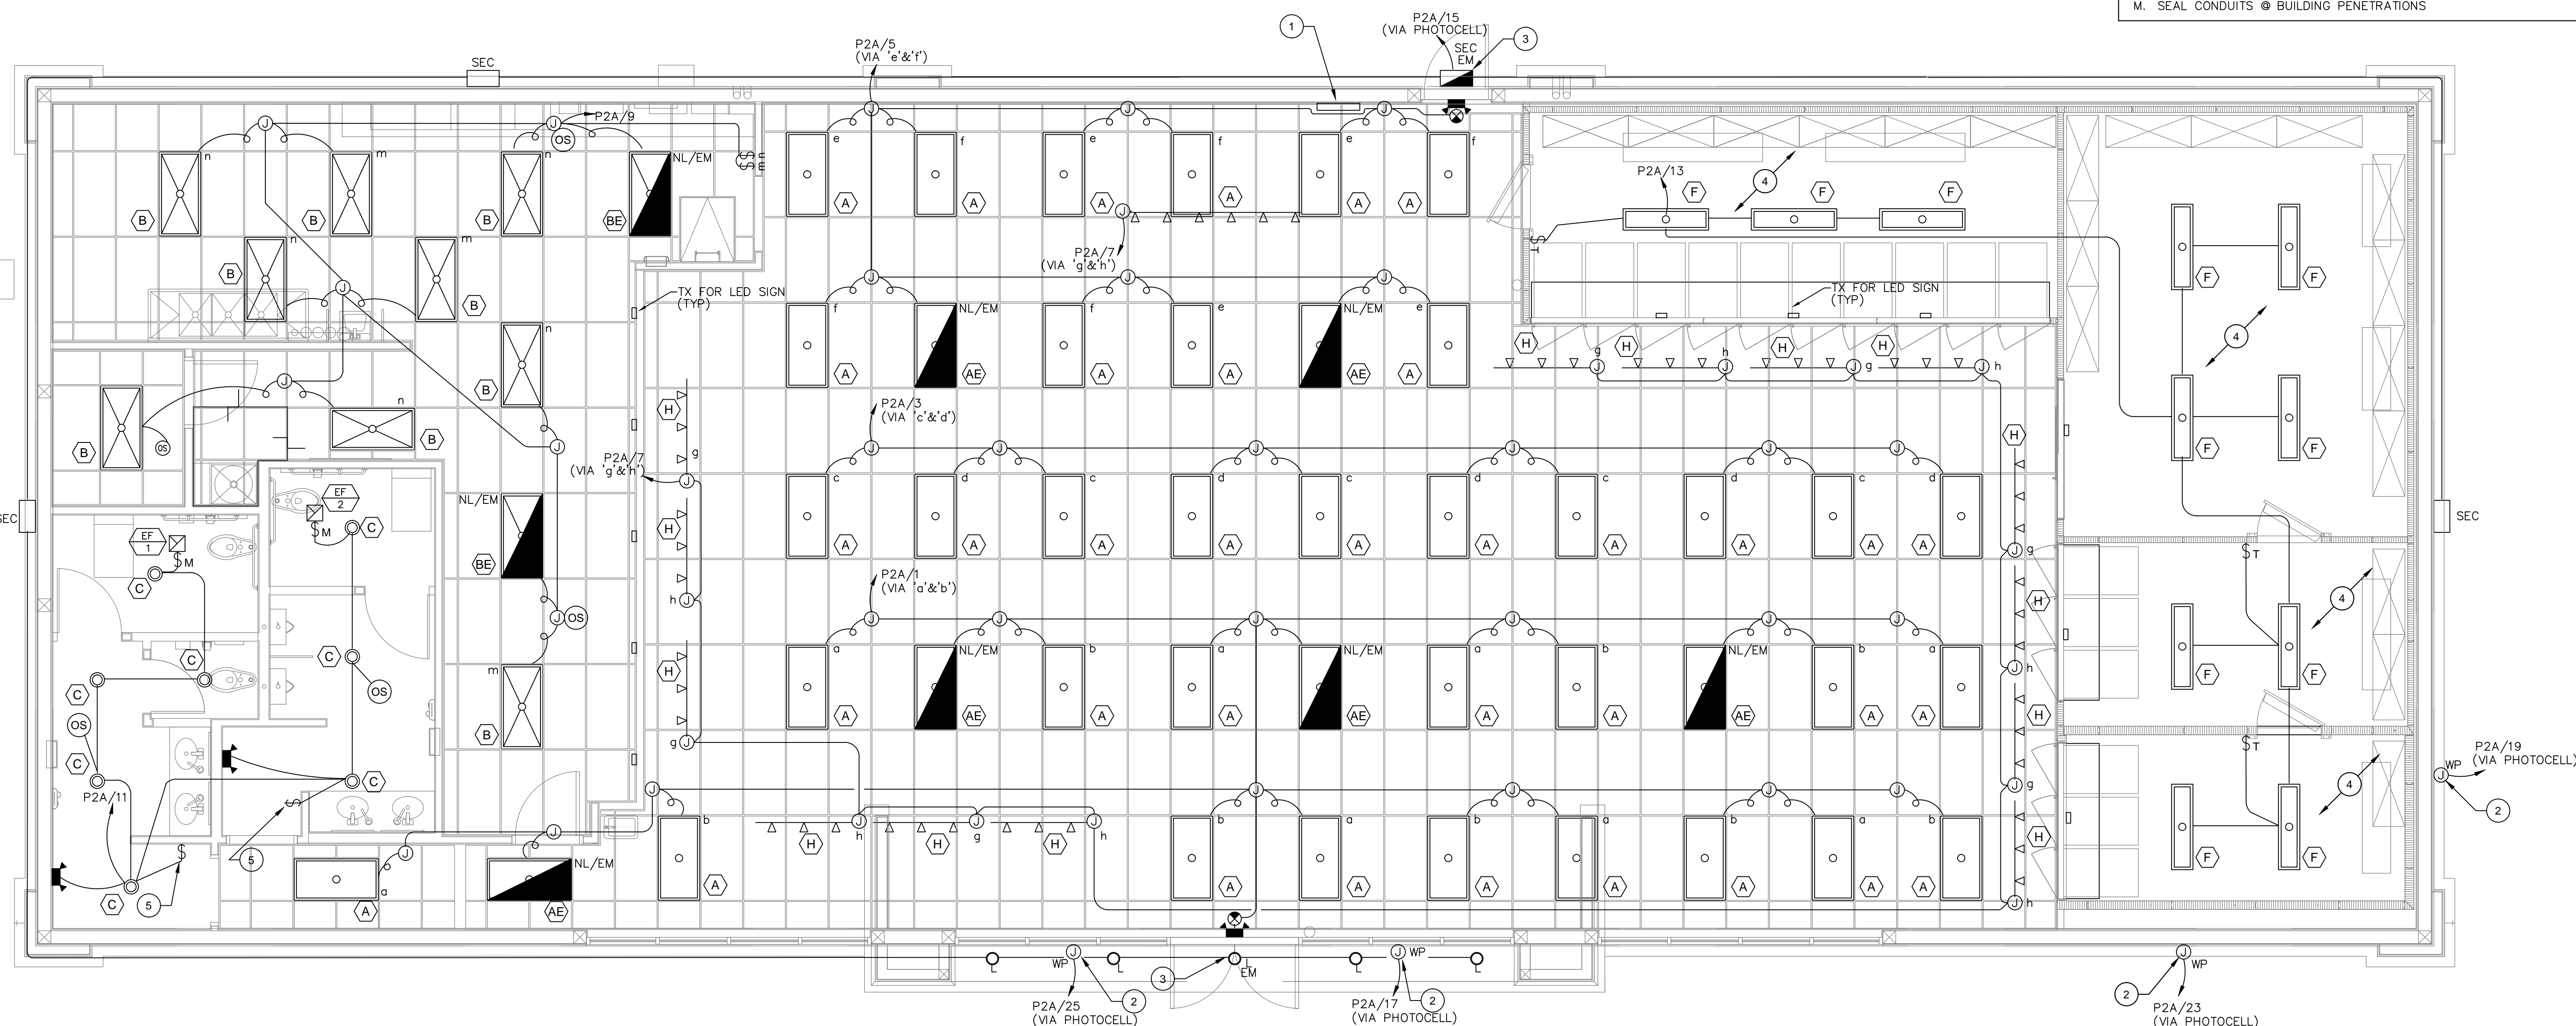

0 1 2 4 8 12

SCALE $\frac{1}{4}" = 1'-0"$ FEET

**GreenbergFarrow**

COPYRIGHT NOTICE
This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional.

ISSUE/REVISION RECORD

DATE	DESCRIPTION
02/13/15	PERMIT SET

KEYED NOTES

1. REFER TO SWITCH BANK DETAIL, DETAIL E2/DRAWING E1.0, FOR SWITCHING OF SALES FLOOR LIGHTING.
2. REFER TO ARCHITECTURAL SHEETS FOR ACCESS PANEL FOR SIGNAGE IN THIS SOFFIT AREA.
3. PROVIDE HIGHLIGHTS EMERGENCY BATTERY PACK 'PGN' (SEE DETAIL E3/DRAWING E1.0).
4. PROVIDE TEMPERATURE SEAL/FIRE STOP FOR ALL CONDUITS AND HOME RUNS IN THESE AREAS PER NEC 300.7.
5. NEW MANUAL OVERRIDE SWITCH FOR THE CEILING MOUNTED OCCUPANCY SENSOR.

NOTES

- A. COORDINATE ALL WORK WITH OTHER TRADES AND THE PROJECT MANAGER.
- B. VERIFY LOCATION AND MOUNTING HEIGHT OF ALL LIGHT FIXTURES WITH THE ARCHITECT/OWNER PRIOR TO ROUGH-IN.
- C. THE EXIT, EMERGENCY AND NIGHT LIGHT FIXTURES SHALL NOT BE SWITCHED.
- D. RGS CONDUIT SHALL BE USED IN ALL EXTERIOR LOCATIONS.
- E. MINIMUM CONDUIT SIZE SHALL BE 1/2".
- F. MINIMUM PIPE SIZE SHALL BE #12 THHN/THWN CU.
- G. ALL EXTERIOR LIGHT FIXTURES SHALL BE CONTROLLED VIA PHOTOCELL.
- H. REFER TO THE PANEL SCHEDULE ON DRAWING E4.0 FOR CONDUIT/WIRE SIZE AND LOAD DESIGNATIONS. THERE SHALL BE NO SHARED NEUTRALS.
- I. CONDUIT(S) SHALL NOT BE ROUTED EXPOSED ON ANY EXTERIOR WALL.
- J. ALL EXTERIOR DEVICES SHALL BE WEATHERPROOF RATED.
- K. REFER TO DRAWING E1.5 FOR THE LIGHT FIXTURE SCHEDULE.
- L. PROVIDE STAINLESS STEEL SWITCH COVER PLATES FOR ALL CUSTOMER ACCESSIBLE AREAS. (RESTROOMS, HALLWAY, COOLER, SALES AREA)
- M. SEAL CONDUITS @ BUILDING PENETRATIONS

FOR BID ONLY

PROFESSIONAL SEAL

2/16/1

PROFESSIONAL IN CHARGE

GUIDO INOA ALVAREZ

PROJECT MANAGER

GUIDO INOA ALVAREZ

QUALITY CONTROL

GUIDO INOA ALVAREZ

DRAWN BY


GUIDO INOA ALVAREZ

PROJECT NAME

**CIRCLE K
STORES, INC.**

ALBUQUERQUE
NEW MEXICO

**4400 COORS BLVD. SW
ALBUQUERQUE, NM 87121**



CIRCLE K STORES INC

PROJECT NUMBER

20130791

SHEET TITLE

LIGHTING PLAN

SHEET NUMBER

E1.0