


Circle K Southwest Prototype 1480 - 09/1/2014  
Drawing Name: P:\1514\20140041.0\20140041.000 Electrical Construction Documents\Drawings\Lighting\20140041.000 Lighting Plan.dwg  
Date: 02/28/2014  
Drawn by: WLL

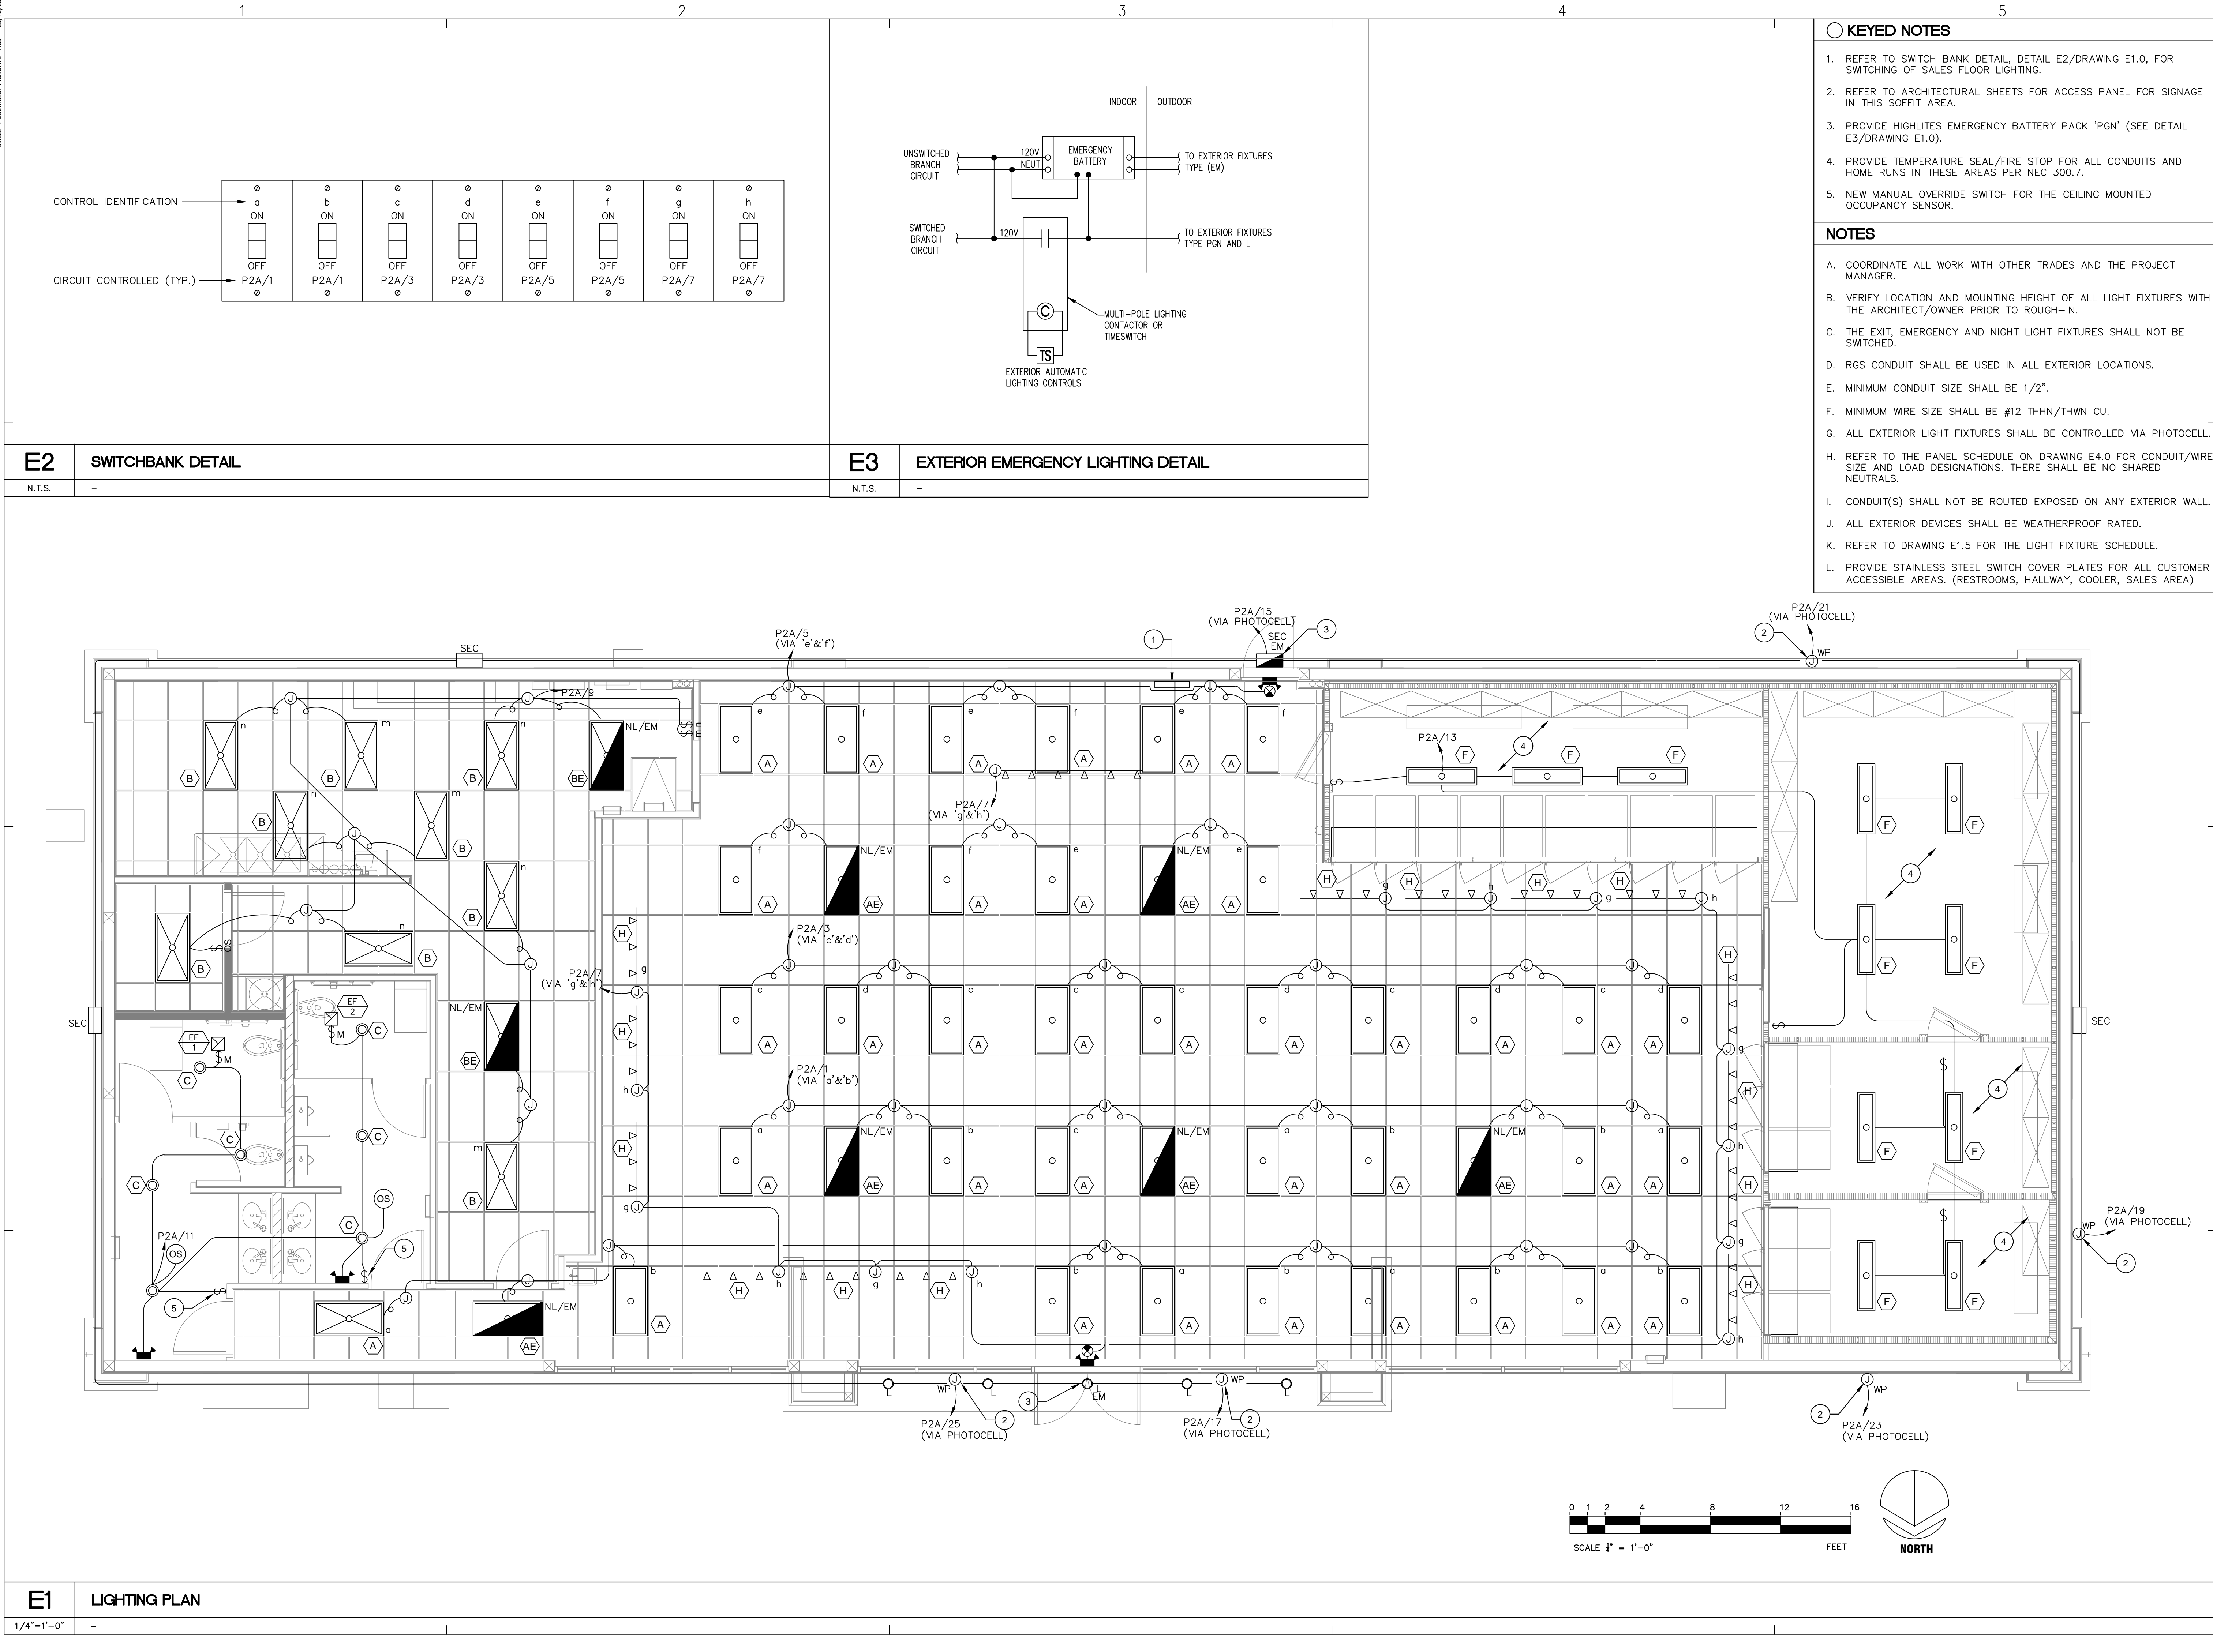

- KEYED NOTES**
1. REFER TO SWITCH BANK DETAIL, DETAIL E2/DRAWING E1.0, FOR SWITCHING OF SALES FLOOR LIGHTING.
  2. REFER TO ARCHITECTURAL SHEETS FOR ACCESS PANEL FOR SIGNAGE IN THIS SOFFIT AREA.
  3. PROVIDE HIGHLIGHTS EMERGENCY BATTERY PACK 'PQN' (SEE DETAIL E3/DRAWING E1.0).
  4. PROVIDE TEMPERATURE SEAL/FIRE STOP FOR ALL CONDUITS AND HOME RUNS IN THESE AREAS PER NEC 300.7.
  5. NEW MANUAL OVERRIDE SWITCH FOR THE CEILING MOUNTED OCCUPANCY SENSOR.
- NOTES**
- A. COORDINATE ALL WORK WITH OTHER TRADES AND THE PROJECT MANAGER.
  - B. VERIFY LOCATION AND MOUNTING HEIGHT OF ALL LIGHT FIXTURES WITH THE ARCHITECT/OWNER PRIOR TO ROUGH-IN.
  - C. THE EXIT, EMERGENCY AND NIGHT LIGHT FIXTURES SHALL NOT BE SWITCHED.
  - D. RGS CONDUIT SHALL BE USED IN ALL EXTERIOR LOCATIONS.
  - E. MINIMUM CONDUIT SIZE SHALL BE 1/2".
  - F. MINIMUM WIRE SIZE SHALL BE #12 THHN/THWN CU.
  - G. ALL EXTERIOR LIGHT FIXTURES SHALL BE CONTROLLED VIA PHOTOCELL.
  - H. REFER TO THE PANEL SCHEDULE ON DRAWING E4.0 FOR CONDUIT/WIRE SIZE AND LOAD DESIGNATIONS. THERE SHALL BE NO SHARED NEUTRALS.
  - I. CONDUIT(S) SHALL NOT BE ROUTED EXPOSED ON ANY EXTERIOR WALL.
  - J. ALL EXTERIOR DEVICES SHALL BE WEATHERPROOF RATED.
  - K. REFER TO DRAWING E1.5 FOR THE LIGHT FIXTURE SCHEDULE.
  - L. PROVIDE STAINLESS STEEL SWITCH COVER PLATES FOR ALL CUSTOMER ACCESSIBLE AREAS. (RESTROOMS, HALLWAY, COOLER, SALES AREA)

**GreenbergFarrow**  
19000 MacArthur Blvd., Suite 250  
Irvine, CA 92612  
t: 949 296 0450 f: 949 296 0437

**COPYRIGHT NOTICE**  
This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional.

**ISSUE/REVISION RECORD**

DATE	DESCRIPTION
02/28/2014	PERMIT/BD SET

**PROFESSIONAL SEAL**

**PROFESSIONAL IN CHARGE**  
GUIDO INOA-ALVAREZ  
**PROJECT MANAGER**  
JOHN ADDISON  
**QUALITY CONTROL**  
GUIDO INOA-ALVAREZ  
**DRAWN BY**  
LATONYA WILLIAMS

**PROJECT NAME**  
**CIRCLE K STORES, INC.**

**PFLUGERVILLE TEXAS**

**SEC WEST PECAN ST. & SARAH'S CREEK DR. PFLUGERVILLE, TX**

**CIRCLE K STORES INC.**

**PROJECT NUMBER**  
20140041.5

**SHEET TITLE**  
LIGHTING PLAN

**SHEET NUMBER**  
**E1.0**